


SES-160-I-107SPE, SEMI-AUTOMATIC LABELLING UNIT

Customer: SES

Machine No: 22143

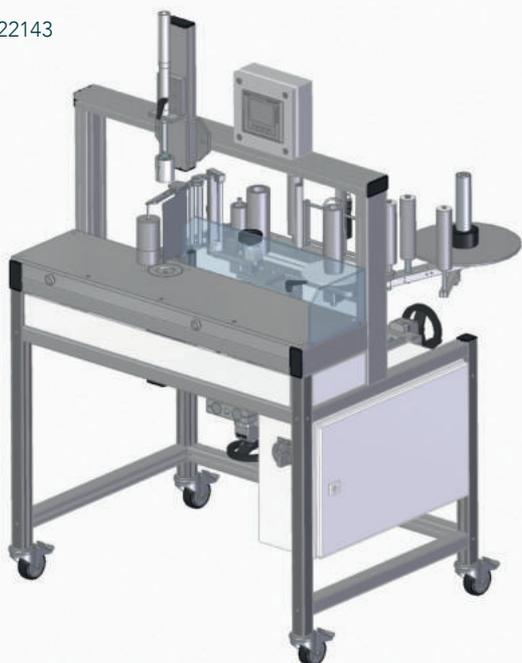

THE REQUEST:

Labelling of round bottles, oval bottles, square tins and rectangular products

THE CHALLENGE:

Labelling at different label dispenser speeds and with turntable (due to pack geometries)

OUR SOLUTION:

Software development with simple input of product-specific parameters via a recipe management system, setting via scales and format tables for the mechanical settings, simple exchange of format parts

AT A GLANCE:

Technical Data	SES-160-I-107SPE
General Data	
Output	Up to 12 pcs./min, depending on operator and product
Installed labelling machines	SES-160-I-107SPE right hand mounted
Execution	Semi automatic operation for complex product shapes
Weights and measures	
Speed	- m/min
min. label width	25 mm
max. label width	160 mm
Label length	10 mm ÷ 180 mm (optional 300 mm)
Diameter of labelreel	max. Ø 300 mm
Dispensing speed	max. 25 m/min
Weight of the unit	approx. 150 kg
Electrical Data	
Control System	SPS-control, graphic display (colour) for operating and malfunction indication
Connected load	max. 2 kVA
Voltage/Freq.	230 V AC/50 Hz
Label detection	photocell
Product detection	Manual placement of the products



SEIT 1984 IHR PARTNER
FÜR ETIKETTIERLÖSUNGEN

CONTACT:

SES Straßburg-Etikettier-Service GmbH, Zunftstrasse 13, 21244 Buchholz i.d.N.
Phone: +49 4181 7044, Email: info@ses-strassburg.de, www.ses-strassburg.de